

FHSC-DAC

Repair closure for DAC cable

A repair closure for DAC cable is a compact solution for both inline and end protection, designed for subscriber DAC (Direct Access Cable) cables intended for direct burial.

The product is designed as a component of a fiber optic network for wall or pole installation, providing an IP65 protection rating.

Made of high-quality ABS material, the closure features a gel seal between the two covers, making it resistant to moisture and dust.

The FHSC-DAC repair closure is an ideal solution for fiber optic installations requiring high reliability and resistance to harsh environmental conditions.


Its compact design and complete set of installation accessories make installation and maintenance easier, ensuring long-term and secure operation of the fiber optic network.



Technical specifications

Repair closure for DAC cable

Number of cable inputs	2
Capacity	Up to a maximum of 12 welds
IP	IP65
Color	black
Dimensions (H/W/D)	901x190x215 [mm].
Weight	0,6kg

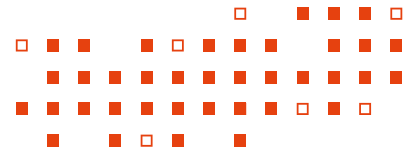

Installation versatility

The closure can be installed both on a wall and on a pole, providing flexibility in choosing the installation location.

It is an ideal solution for repairing subscriber cables in a variety of environments.

High sealing performance and resistance to weather conditions

The closure features an IP65 protection rating, meaning it is fully protected against dust ingress and resistant to water jets from any direction.

The gel seal between the covers provides additional protection against moisture.

Compact design and high capacity

Designed to accommodate up to 12 fiber optic splices, making it a compact yet efficient solution for repair needs.

It features two entry ports with a diameter of 80 mm, which simplifies installation and cable management.