



OUT-0000

## Empty subscriber socket, allows installation of 2xSC simplex/LC duplex

Subscriber outlets are used to terminate the fiber optic network on the subscriber side. It has the ability to install two SC simplex adapters or two LC duplex adapters, which allows the termination of 2 to 4 optical fibers. The simple design of the outlet ensures the possibility of a very efficient installation of fibers, and its intended use for indoor installation makes it an ideal solution for various types of fiber optic installations. The subscriber outlet is an excellent solution for fiber optic installations in residential and commercial buildings, ensuring quick and easy installation as well as flexibility in configuration.


Its simple design, along with the option for both surface and flush mounting, makes it a versatile and user-friendly product.



## Technical specifications

Empty subscriber socket, allows installation of 2xSC simplex/LC duplex

<b>Number of adapter slots</b>	2 x SC simplex
<b>Maximum number of welds</b>	4
<b>Cable length</b>	cable with a diameter of 0.9 mm - 4 mb, cable with a diameter of 2 mm - 1.5 mb
<b>IP</b>	IP20 - IK08
<b>Equipment</b>	Empty (without sockets, pigtails)
<b>Dimensions (H/W/D)</b>	82x82x22 [mm].
<b>Weight</b>	0,1kg
<b>Color</b>	gray (RAL7035)

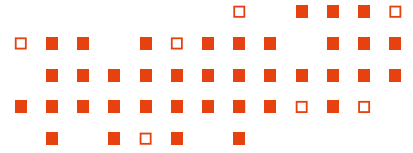

### **Easy installation**

The subscriber outlet can be both wall-mounted and flush-mounted, providing installation flexibility in a variety of building conditions.

### **Versatility and compatibility**

The product allows the installation of two SC simplex adapters or two LC duplex adapters, which allows the termination of 2 to 4 optical fibers. This makes the socket compatible with various fiber optic network standards and configurations.